

MODEL

GC24688 系列

立柱式自动剪线综合送料厚料平缝机

POST-BED HEAVY DUTY COMPOUND FEED
LOCKSTITCHER WITH TRIMMER

GC24688-1L-D

GC24688-1R-D

GC24688-2-D

HIGHLEAD CANADA

WWW.HIGHLEADCANADA.COM



本系列产品具有自动切线、自动倒缝和自动压脚提升功能及压脚交互运动量切换、压脚导向功能关闭装置。送料量大、噪音低、切线装置信赖可靠。本机采用气动式压脚提升及倒缝，内藏式卷线装置，大型顶置式旋钮可方便地调节设定压脚交互量，并自动调整适当的缝速。倒缝、补针、加固缝操作简单易。自动润滑装置使本机运转轻滑，经久耐用。适用于缝制各种汽车座垫、车内装饰、布艺家具、帐篷伞具、旅行箱包、体育用品等各种皮革、尼龙、合成皮革、帆布类的中厚料或厚料缝料。

GC24688-1L-D 立柱式自动剪线综合送料厚料平缝机(左缝台)

GC24688-1R-D 立柱式自动剪线综合送料厚料平缝机(右缝台)

GC24688-2-D 立柱式双针自动剪线综合送料厚料平缝机

This machine is designed with automatic thread trimming, automatic back tacking, automatic presser foot lifting, presser foot alternation adjuster and automatic stitch regulator, featuring large feeding amount, quiet performance, reliable thread trimming, easy operation for back tacking, stitch compensation, dense stitching and bartacking. Besides, it adopts pneumatic presser foot lifting, pneumatic back tacking and builtin bobbin winder. The big top dial enables convenient adjustment of presser foot alternating amount and proper sewing speed, and the automatic lubricating system makes the machine run smoothly and durably. It is available in stitching leather, nylon, synthetic leather, canvas for car seat, car interior decoration, upholstery, tent, umbrella, traveling case, traveling bag, sports requisites, etc.


GC24688-1L-D Single needle post-bed heavy duty compound feed lockstitcher with trimmer (Left-side stitching bed)

GC24688-1R -D Single needle post-bed heavy duty compound feed lockstitcher with trimmer (Right-side stitching bed)



GC24688-2-D Post-bed twin-needle heavy duty compound feed lockstitcher with trimmer

特殊规格针间距请在订货时指定

Please specify for special needle gauge when ordering

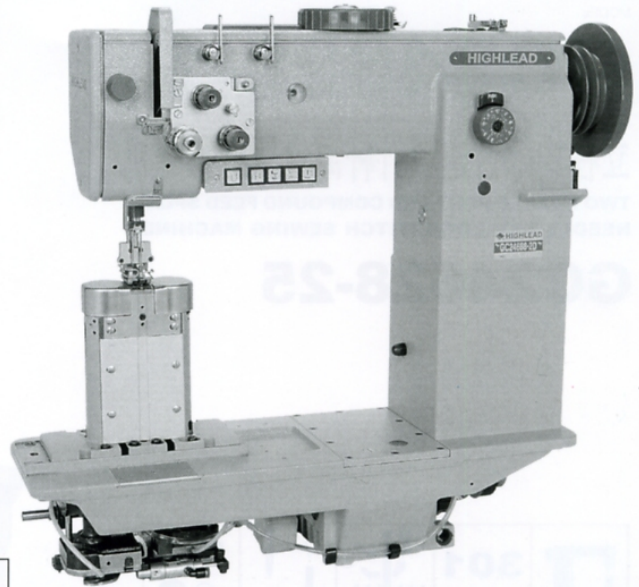

GC24688-2-D 立柱式自动剪线综合送料厚料平缝机

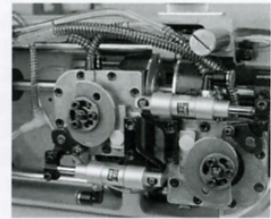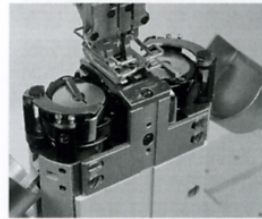

型号 Model	GC24688-1L-D	GC24688-1R-D	GC24688-2-D
最高缝速 Max.sewing speed	2400 r.p.m.		
线迹长度 Stitch length	0 - 9 mm		
针杆行程 Needle bar stroke	34 mm		
压脚提升高度 Presser foot lift	手动 10 mm 气动 16 mm 10mm By hand 16mm By pneumatic		
机针 Needle size	DP × 35R 19 [#] - 25 [#] (标准 23 [#]) (Standard 23 [#])		
旋梭 Rotating hook	1.6 倍大旋梭 Large vertical hook (1.6 times)		
压脚交互运动量 Presser foot alternation	1 - 7 mm		
针间距 Needle gauge			8 mm (Standard) 10,12mm
缝台高度 Highness of post-bed	170 mm		
压脚自动提升装置 Auto presser foot lifter	气缸式 Pneumatic		
交互运动量切换装置 Presser alternation adjuster	气缸式 Pneumatic		
安全装置 Safety device	标准配置 Standard		
润滑方式 Lubrication	自动润滑 Auto lubricated		
电动机 Motor	220 伏 750 瓦伺服电机 220V750W Servo motor		