


MODEL

GM288 系列

高速包缝机

HIGH SPEED OVERLOCK SEWING MACHINE

GM288-2 GM288-3 GM288-4 GM288-5 GM288-6

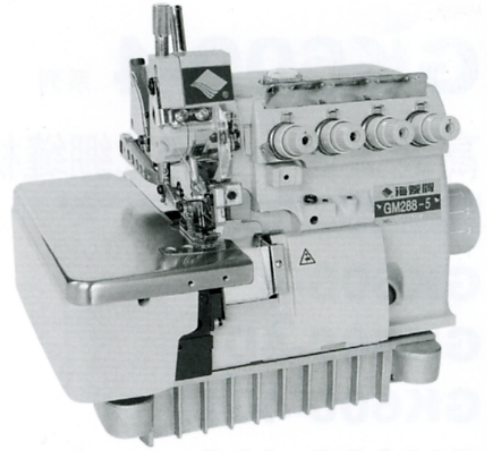

GM288-5 高速五线包缝机




海菱 GM288 系列包缝机在外形设计上采用了国际流行的款式。结构上吸收了国际先进水平的优点，性能上突出了市场需求的适应面广、实用性强的特点。缝线平稳、优越的操作性、简便的维护是它的特点。

本机主要部位装有滚珠或滚针轴承，运转轻滑。采用全封闭润滑系统和硅油冷却机针装置，差动牙微量调节和按钮式针距调节装置。缝线、切刀以及弯针的调整都极为方便。适用于各种薄料，中厚料织物的包边、包缝，是针织、服装、衬衫厂高效的缝纫设备。

Highlead brand GM288 series overlock sewing machine is designed with fashionable appearance and world advanced mechanism. It features wide and practical application, nice and smooth stitching, easy operation and maintenance.

This series of overlock sewing machine is equipped with ball bearing or needle bearing which makes it running light and smooth, fully closed lubrication system, silicon oil needle cooling device, fine adjustment of differential feed dog and knob-type stitch regulator. It is also convenient to adjust the thread, the knife and the loopers and can perform overlock and overedge on all kinds of fabric from light to medium heavy weight as an efficient sewing equipment in knitting and garment factories.



型号 Model	用途 Application	机针数 Number of needle	缝线数 Number of thread	线迹代码 Stitch code	线迹长度 Stitch length	线迹宽度 Stitch width	针间距 Needle gauge	差动比 Differential ratio	压脚提升 Presser foot lift	最高缝速 Max. Sewing speed
GM288-2	印染接头 Butted seaming for dyeing	1	2	503	1.0-3.6mm	7 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-3	基本型 Standard	1	3	504	1.0-3.6mm	4 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-4	基本型 Standard	2	4	514	1.0-3.6mm	6.2 mm	2.2 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-5	基本型 Standard	2	5	516	1.5-3.6mm	7 mm	3 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-6	基本型 Standard	3	6	543	1.5-3.6mm	10.0 mm	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-301	厚料包缝 Heavy duty overlock	1	3	504	1.0-3.6mm	5 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-302	暗缝包缝 Blind hemming	1	3	505	1.0-3.6mm	4 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-303	线辫卷入装置 Back latching	1	3	504	1.0-3.6mm	4 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-3D	自动剪线 Auto thread trimming	1	3	504	1.0-3.6mm	4 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-304	袜头包缝 Fine edging	1	3	504	1.0-3.6mm	2 mm	—	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-401	肩带包缝 Tape inserting	2	4	514	1.0-3.6mm	6.2 mm	2.2 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-402	线辫卷入装置 Back latching	2	4	514	1.0-3.6mm	4 mm	2 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-403	双链口袋滚边 Pocket seaming	2	4	401	1.0-3.6mm	—	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-4D	自动剪线 Auto thread trimming	2	4	514	1.0-3.6mm	4 mm	2 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-501	极厚料包缝 Jeans overlock (14 oz.)	2	5	516	1.5-3.6mm	9.8 mm	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-502	极厚料包缝 Wide seam jeans overlock (14 oz.)	2	5	516	1.5-3.6mm	11.8 mm	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-503	中厚料包缝 Medium heavy duty overlock	2	5	516	1.5-3.6mm	7 mm	3 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-504	宽幅包缝 Wide seam medium heavy duty overlock	2	5	516	1.5-3.6mm	9.8 mm	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-505	厚料包缝 Heavy duty overlock	2	5	516	1.5-3.6mm	9.8 mm	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.
GM288-506	厚料包缝 Wide seam heavy duty overlock	2	5	516	1.5-3.6mm	11.8 mm	4.8 mm	0.8-1.9	6.5 mm	6500 r.p.m.