

MODEL

GC24698 系列

超高立柱式综合送料平缝机

SUPER POST BED COMPOUND FEED LOCKSTITCH SEWING MACHINE

GC24698-1L

GC24698-1R

GC24698-BL



GC24698-BR

GC24698-2B



本系列机型是海菱高台机家族中的特高个。采用综合送料方式和超高立柱式缝台。根据缝制品的需要，分为左缝台(L)和右缝台(R)。缝台采用特殊设计的针板，适用于缝制大型立体及小曲度的物品。针距调节，倒缝操作轻松简便，缝纫顺畅自如，线迹稳定美观。最适用于缝制皮靴，手提袋、帽子、假发、箱包类产品。

This model is designed with compound feed mechanism and super post bed. It is subclassed into left-side stitching bed (L) and right-side stitching bed (R) to meet different sewing requests. With special needle plate it is available for sewing large and cubic articles with small radius, such as boots, handbags, hats, perwigs, case & bag, and so on. And it features easy stitch regulation, easy reverse feeding, smooth sewing and beautiful stitches.

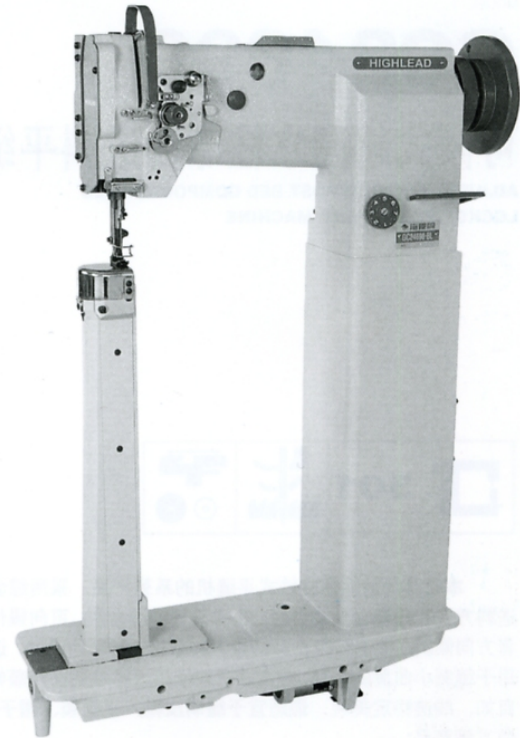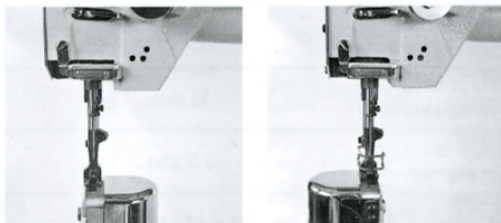

GC24698-BL 超高立柱式综合送料平缝机

型号 Model	GC24698-1L	GC24698-BL	GC24698-1R	GC24698-BR	GC24698-2B
缝台位置 Bed type	左缝台 Left-side stitching bed		右缝台 Right-side stitching bed		—
最高缝速 Max. sewing speed	1600 r.p.m.				
线迹长度 Stitch length	0-6 mm	0-7 mm	0-6 mm	0-7 mm	0-7 mm
针杆行程 Needle bar stroke	36 mm				
压脚提升 Presser foot lift	手动 By hand		8 mm		
	脚控 By foot		15 mm		
压脚交互量 Presser foot alternation	3-5 mm				
机针 Needle size	DP × 17 17 [#] -23 [#]				
针间距 Needle gauge	—				9.5 mm (8.0 mm 选配件 Option)
旋梭 Rotating hook	立式旋梭 Vertical hook				
缝台高度 Heightness of post-bed	450 mm				
润滑方式 Lubrication	半自动润滑 Semi-auto lubricated				
电动机 Motor	370 瓦缝纫机专用电机 1400 转 / 分 370W Clutch motor 1400r.p.m.				